

25x25 mm C+T ALUMINIUM HORIZONTAL BLIND


CUSTOMER:

Order No.


Ordered on

Date of delivery


Control options
wand, pull cord
(column 7)

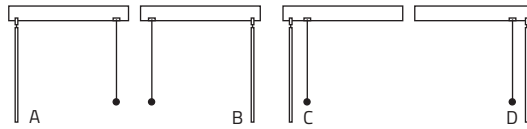

Types of fastening brackets
(column 6)

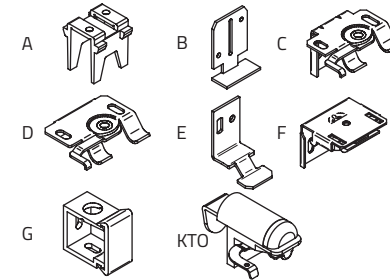

Types of brackets (side guide)
(column 9)



Overall width (mm)	Overall height (mm) ⁽¹⁾	QTY (pcs)	Tape		Colour of tape	Type of fastening brackets ⁽²⁾	Control A/B/C/D	Set for tilt windows				Side guide bracket ⁽³⁾	WOOD/AL. system ⁽⁴⁾			Light Less for 25 tape	CHILD SAFETY Room children have access to (compliant with the standard) ^(5, 6)		
			16	25				side guide		bottom bar bracket	magnets		Colour of wood accessories for WOOD/AL. (complete system) ⁽⁴⁾	Valance			YES	NO	NO
								plastic cord	steel cord					straight	with sides			Control length in accordance with manufacturer's standard	Non-standard control length ⁽⁶⁾
1	2	3	4	5	6	7	8				9	10			11	12			

PLEASE NOTE:

- Height tolerance = up to + 10 mm (due to space between slats which is determined by the ladder).
- Available colours of brackets: Type A - white, Type B & E - white, silver, Type C, D, F - galvanized, Type G - transparent Type KTO - white, brown, black.
- The available side guide bracket colours: Type A - white, brown, Type B i C - transparent, Type D - white, brown, beige, silver, black, galvanized, KTU - white, brown, black.
- Available colours of wooden accessories (WOOD/AL. system) as in 25 mm wood slats catalogue.
- Should you select no option in column 12, the manufacturer will assume that the product is intended for rooms young children have access to (length of operating chains/cords compliant with PN-EN 3120:2014+A1 standard).
- Non-standard control length (please enter the value in column 12): 200, 400, 600, 800, 1000, 1200, 1400, 1600, 1800, 2000, 2200, 2400, 2600, 2800, 3000 (mm). If control length is not determined, the blind will be produced in accordance with manufacturer's standardisation.

Bottom rail bracket **Comments:**

(kolumna 8)



Magnet
(column 8)

