


25 mm HORIZONTAL WOOD BLIND

CUSTOMER:
.....
Order No.
Ordered on
Date of delivery

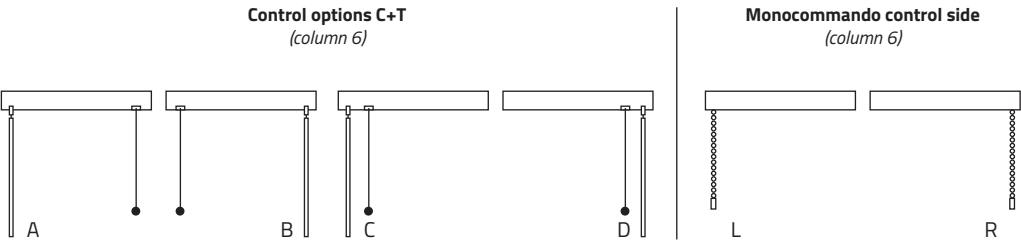

Mounting location		Types of fastening brackets (column 5)
	wall	
	ceiling	
	window sash	
	recess	B

Total width (mm)	Total height (mm) ⁽²⁾	QTY (pcs)	Colour of slats	Fastening brackets ⁽³⁾	Control				Ladder		Colour of ladder	Up/down limiter ⁽⁵⁾	Valance		Set for tilt windows		CHILD SAFETY	
					C+T A/B/C/D	Monocommando			cord	tape			steel cord	bottom bar bracket ⁽⁷⁾	Room children have access to (compliant with the standard) ^(8, 9, 10)			
						R/L	colour of mech ⁽⁴⁾	metal ball chain (optional)							YES	NO		
																Control length		
1	2	3	4	5	6				7		8	9		10		11		

Types of fastening brackets
(column 5)

Types of brackets
(side guide)
(column 10)

Please note:

Up/down limiter
(column 8) ⁽⁵⁾

Bottom bar bracket
(column 10) ⁽⁷⁾

Comments:

1 Blinds of max. 300 mm width are fitted with A and B control systems only.
Blinds wider than 400 mm are fitted with A, B, C, D systems.
Max. length of the wand is 120 cm, option 'with extention' should be mentioned in the „Comments“ column.

2 Standard height tolerance equals max +10 mm (the distance between the slats determined by the ladder).

3 Available colours of fastening brackets: Type A -white, Type B – white, Type C,D,E,F – zinc, KTO – white, black brown.

4 Colours of monocommando gear unit: white, ivory, grey, brown, black – colour-coordinated plastic ball chain.

5 Recommended with monocommando (mono chain) control mechanism.

6 Blinds with monocommando (mono chain) control mechanism fitted with valance with one side only.

7 Bottom bar bracket available with C+T system only.

8 Should you select no option in column 11, the manufacturer will assume that the product is intended for rooms young children have access to
(length of operating chains/cords compliant with PN-EN 13120:2014+A1 standard).

9 Control length in C+T system according to the criteria before the blind was adapted to the Child Safety standard ranges from 100 mm to 3400 mm
(gradation every 100 mm).

10 Control length in monocommando (mono chain) system before the blind becomes compliant with 'Child Safety' standard ranges from 250 to 3000 mm
(gradation every 250 mm). If control length is not determined, the blind will be produced in accordance with manufacturer's standardisation.

edition August_2024

legible signature of the Customer