

50 mm C+T HORIZONTAL WOOD BLIND

CUSTOMER:





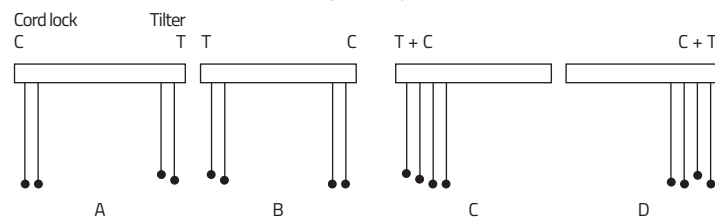
Order No.

Ordered on

Date of delivery

Control options
(column 5)

Types of brackets
(column 6)

[illegible]

Please note:

- 1 Blinds of max. 450 mm width are fitted with A and B control systems only.
Blinds wider than 450 mm are fitted with A,B,C,D systems.
- 2 Standard height tolerance equals max. + 20 mm (the distance between the slats is determined by the ladder).
- 3 Should you fail to select an option in column 6, bracket A will be fitted.
- 4 No-drill bracket available in white only.
- 5 Milled bottom rail is available with 10 / 25 / 38 mm tape ladder only.
- 6 Should you select no option in column 12, the manufacturer will assume that the product is intended for rooms young children have access to (length of operating chains/cords compliant with PN-EN 13120:2014+A1 standard).
- 7 Control length before the blind becomes compliant with 'Child Safety' standard ranges from 500 mm to 3400 mm (every 100 mm). If control length is not determined, the blind will be produced in accordance with manufacturer's standardisation.

Bottom bar bracket
(column 10)



Side guide mechanism
type of bracket
(column 11)



Comments: