anwis

50 mm TWIN PULL HORIZONTAL WOOD BLIND

CUSTOMER: .....

.....

Order No. .....

Ordered on .....

Date of delivery .....

Control side
(column 5)

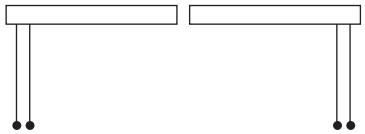

Bracket
(column 6)

A - standard



B - top bracket



C - extended bracket



No drill bracket [3]



Total width (mm)	Total height (mm) [1]	QTY (pcs)	Colour of slat	Control side		Bracket [2]				Ladder [4]				Colour of ladder	Set for tilt windows		Valance		Milled bottom rail [5]	CHILD SAFETY	
																				Room children have access to (compliant with the standard) [6,7]	
															steel cord	bottom bar bracket				YES	NO
											tape ladder										
				L	R	A	B	C	No drill bracket [3]	cord ladder	10 mm	25 mm	38 mm		bracket B		straight	with sides			Control length
1	2	3	4	5		6				7					8		9			10	

Please note:

1 Standard height tolerance equals max. + 20 mm (the distance between the slats is determined by the ladder).
2 Should you fail to select an option in column 6, bracket A will be fitted.
3 No-drill bracket available in white only.
4 The standard blind is fitted with cord ladder.
5 Milled bottom rail is available with 10 / 25 / 38 mm tape ladder only.
6 Should you select no option in column 10, the manufacturer will assume that the product is intended for rooms young children have access to (length of operating chains/cords compliant with PN-EN 13120:2014+A1 standard).
7 Control length before the blind becomes compliant with 'Child Safety' standard ranges from 500 mm to 5000 mm (every 100 mm). If control length is not determined, the blind will be produced in accordance with manufacturer's standardisation.

Side guide mechanism type of bracket
(column 8)

Type B

Bottom bar bracket
(column 8)

Comments:

.....
legible signature of the Customer

edition August_2024