



LIGHT 50 mm HORIZONTAL WOOD BLIND FSC®

CUSTOMER: .....  
.....  
Order No. ....  
Ordered on .....  
Date of delivery .....

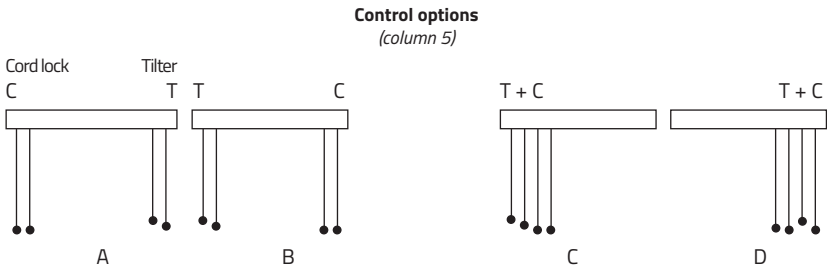

Total width (mm)	Total height (mm) <sup>(1)</sup>	QTY (pcs)	Colour of slat	Control				Ladder <sup>(2)</sup>			Bracket <sup>(3)</sup>		Valance <sup>(5)</sup>		CHILD SAFETY	
				A	B	C	D	cord ladder	25 mm tape ladder	38 mm tape ladder	A	no drill bracket <sup>(4)</sup>	straight	with sides	Room children have access to (compliant with the standard) <sup>(6,7)</sup>	
															YES	NO
																Control length
1	2	3	4	5				6			7		8		9	

- Please note:
- 1 Standard height tolerance equals max. + 42 mm (the distance between the slats is determined by the ladder).
  - 2 Should you fail to select an option in column 6, cord ladder will be provided (tape ladder is available in colours compliant with ANWIS standardisation only).
  - 3 Should you fail to select an option in column 7, bracket A will be delivered.
  - 4 No drill bracket available in white.
  - 5 Should you fail to select an option in column 8, straight valance will be delivered.
  - 6 Should you select no option in column 9, the manufacturer will assume that the product is intended for rooms young children have access to (length of operating chains/cords compliant with PN-EN 13120:2014+A1 standard).
  - 7 Non-standard control length (please enter the value in column 9) ranges from 500 mm to 3400 mm (gradation every 100 mm). If control length is not specified, manufacturer's standardisation will apply.

Comments: