
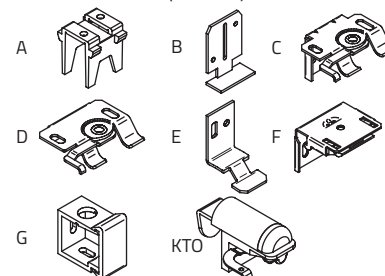




Date of delivery .....

[illegible]

- 1 Height tolerance = up to + 10 mm (cord) (due to space between slats which is determined by the ladder).
- 2 Colour of monocommando gear unit: white, ivory, beige, grey, brown, black; colour-coordinated PVC ball chain used as standard.
- 3 Available colours of brackets - Type A: white; Type B: white, silver; Type C, H, D: zinc; Type E – white, silver; Type F: zinc; Type G – transparent; KTO – white, brown, black.
- 4 Available colours of wooden accessories (WOOD/AL. system) as in 25 mm wood slats catalogue.
- 5 Right or left side depends on which control side is selected.
- 6 Should you select no option in column 16, the manufacturer will assume that the product is intended for rooms young children have access to (length of operating chains/cords compliant with PN-EN 13120:2014+A1 standard).
- 7 Non-standard control length (please enter the value in column 16): 250, 500, 750, 800, 1000, 1250, 1500, 1600, 1750, 2000, 2250, 2500, 2750, 2800, 3000 (mm). If control length is not determined, the blind will be produced in accordance with manufacturer's standardisation

[illegible]