
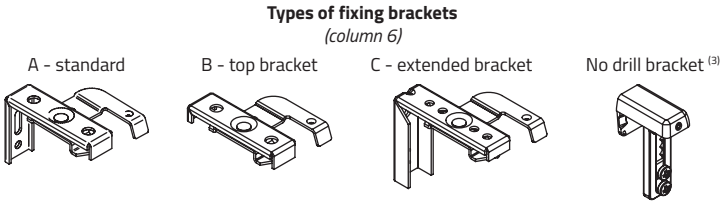


MONOCOMMANDO (MONO CHAIN) 50 mm HORIZONTAL ALUMINIUM BLIND


CUSTOMER:
.....
Order No.
Ordered on
Date of delivery



Overall width (mm)	Overall height (mm) ⁽¹⁾	QTY (pcs)	Colour of tape	Control type			Bracket ⁽⁴⁾				Ladder		Colour of ladder	Type of bottom rail		Set for tilt windows (steel cord)	Colour of wood accessories for WOOD/AL. (complete system) ⁽⁵⁾	WOOD/AL. system ⁽⁵⁾					CHILD SAFETY ^(7, 8)	
							A	B	C	No drill bracket ⁽³⁾	cord ladder	tape ladder		steel	extruded			valance		colour of ladder		Milled bottom rail ⁽⁶⁾	Room children have access to (compliant with the standard)	
				L	R	Colour of mechanism ⁽²⁾												straight	with sides	wood	alum		YES	NO
1	2	3	4	5			6				7	8	9		10		11	12					13	

- Please note:
- 1 Standard height tolerance equals max. + 15 mm
 - 2 Colour of monocommando gear unit: white, ivory, grey, golden oak, black (if no colour is selected, the manufacturer will use a standardised gear unit); metal ball chain is used as standard.
 - 3 No drill bracket available in white only.
 - 4 If no option in column 6 is selected, bracket A will be used.
 - 5 Available colours of wooden accessories (WOOD/AL. system) as in 50 mm wood slats catalogue.
 - 6 Milled bottom rail comes with tape ladder only.
 - 7 Should you select no option in column 13, the manufacturer will assume that the product is intended for rooms young children have access to (length of operating chains/cords compliant with PN-EN 13120:2014+A1 standard).
 - 8 Control length according to the criteria before the blind was adapted to the Child Safety standard ranges from 100 mm to 3400 mm (every 100 mm). If control length is not specified, manufacturer's standardisation will apply.

Brackets used with side guide mechanism (column 10)



Comments: