

MONOCOMMANDO (MONO CHAIN) 50 mm HORIZONTAL BAMBOO BLIND

CUSTOMER: .....


.....

Order No. ....


Ordered on .....

Date of delivery .....

Control side  
(column 5)



Types of fixing brackets  
(column 6)

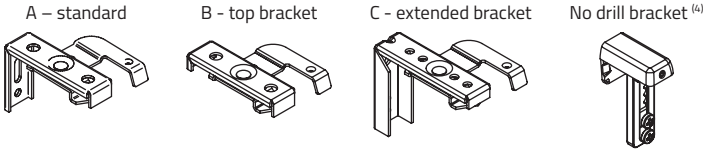

Overall width (mm)	Overall height (mm) <sup>(1)</sup>	QTY (pcs)	Colour of slats	Control side			Bracket <sup>(3)</sup>				Ladder		Colour of ladder	Steel cord for tilt windows		Valance		Milled bottom rail <sup>(5)</sup>	CHILD SAFETY	
				L	R	Colour of mechanism <sup>(2)</sup>	A	B	C	No drill bracket <sup>(4)</sup>	cord ladder	tape ladder		Bracket		straight	with sides		Room children have access to (compliant with the standard) <sup>(6,7)</sup>	
														B	C				YES	NO
																				Length of operating ball chain/pull cords
1	2	3	4	5			6				7		8		9		10			

- Please note:
- 1 Standard height tolerance equals max. + 20 mm
  - 2 Colour of monocommando gear unit: white, ivory, grey, golden oak, black, metal ball chain is used as standard.
  - 3 If no option in column 6 is selected, bracket A will be used.
  - 4 No drill bracket available in white only.
  - 5 Milled bottom rail available with 25 mm tape ladder only.
  - 6 Should you select no option in column 10, the manufacturer will assume that the product is intended for rooms young children have access to (length of operating chains/cords compliant with PN-EN 13120:2014+A1 standard).
  - 7 Non-standard control length (please enter the value in column 10) ranges from 100 mm to 5000 mm (gradation every 100 mm). If control length is not determined, the blind will be produced in accordance with manufacturer's standardisation).

Comments: