

TWIN PULL 50 mm HORIZONTAL ALUMINIUM BLIND

CUSTOMER: .....



Order No. ....

Ordered on .....

Date of delivery .....

Control side  
(column 5)

Types of fixing brackets  
(column 6)

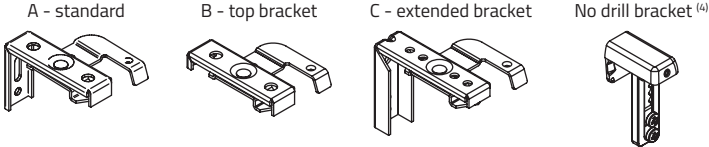

Overall width (mm) <sup>(1)</sup>	Overall height (mm) <sup>(2)</sup>	QTY (pcs)	Colour of tape	Control side		Bracket <sup>(3)</sup>				Ladder <sup>(5)</sup>		Colour of ladder	Type of bottom rail		Colour of wood accessories for WOOD/AL. (complete system)	WOOD/AL. system				CHILD SAFETY	
				L	R	A	B	C	No drill bracket <sup>(4)</sup>	cord	tape		steel	extruded		valance		colour of ladder		Room children have access to (compliant with the standard) <sup>(6,7)</sup>	
																straight	with sides	wood	alum	YES	NO
																					Length of operating ball chain/pull cords
1	2	3	4	5		6				7		8		9	10				11		

- Please note:**
- 1 Min. width of the blind: 450 mm.
  - 2 Standard height tolerance equals max. + 15 mm (due to space between slats which is determined by the ladder).
  - 3 If no option in column 6 is selected, bracket A will be used.
  - 4 No drill bracket available in white only.
  - 5 The standard blind is fitted with cord ladder.
  - 6 Should you select no option in column 11, the manufacturer will assume that the product is intended for rooms young children have access to (length of operating chains/cords compliant with PN-EN 13120:2014+A1 standard).
  - 7 Control length according to the criteria before the blind was adapted to the Child Safety standard ranges from 500 mm to 5000 mm (gradation every 100 mm). If control length is not specified, manufacturer's standardisation will apply.

**Comments:**