

VENUS ALUMINIUM HORIZONTAL BLIND


CUSTOMER:

Order No.

Ordered on

Date of delivery


Control side
(column 6)



Sleeve for wooden windows
(column 9)



Distance plates
(column 10)

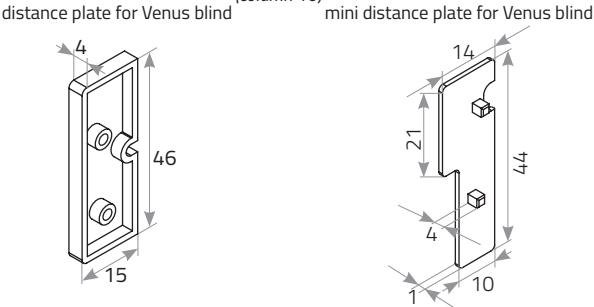

Width (mm) ⁽¹⁾	Height (mm) ⁽²⁾	QTY (pcs)	Tape		Colour of tape	Control side		Colour of accessories								Light less (for AL 25 tape only)	Fixing the plastic cable to wooden windows	Distance plates	CHILD SAFETY		
			16	25		L	R	white	beige	brown	anthracite	silver	golden oak	walnut	winchester				marsh oak	Room children have access to (compliant with the standard) ^(3,4)	
																				YES	NO Length of operating ball chain/pull cords
1	2	3	4		5	6	7								8	9	10	11			

Please note:

1

The standard Venus blind is fitted with a cord lock – min. width: 330 mm.

2

Height tolerance = up to + 22 mm (due to space between slats which is determined by the ladder).

3

Should you select no option in column 11, the manufacturer will assume that the product is intended for rooms young children have access to (length of operating chains/cords compliant with PN-EN 13120:2014+A1 standard).

4

Control length before the blind becomes compliant with 'Child Safety' standard ranges from 100 mm to 3400 mm (every 100 mm). If control length is not determined, the blind will be produced in accordance with manufacturer's standardisation.

Comments: