

FANTAZJA LUX, FANTAZJA MINI-LUX ROLLER BLIND

CUSTOMER:

Order No. _____

Ordered on

Date of delivery

Fig.1 Width and height of the blind

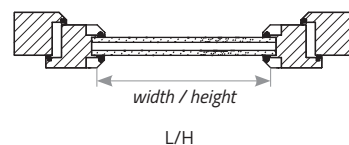


Fig.2 Total width and height of the blind

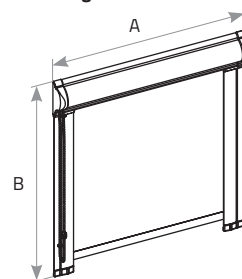


Fig.3 Type of cassette

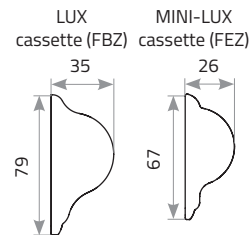
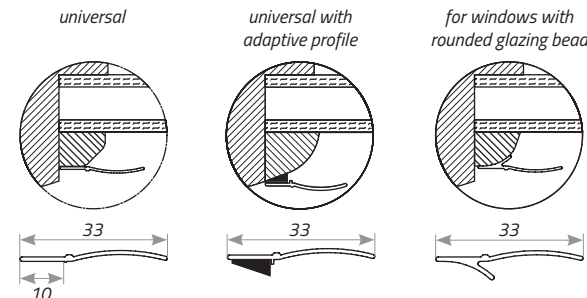


Fig.4 Side guide options

[illegible]

Please note:

- 1 Slight variations in the shades and patterns of fabrics as well as accessories may occasionally occur.
- 2 Fig.1 applies to standard blind measurement (column 1 and 3). The width of the fabric is less than the specified blind width by 17 mm (MINI LUX) or by 10 mm (LUX).
- 3 Fig.2 applies to non-standard measurement of blind's width and height (columns 2 and 4). The width of the fabric is less than the total blind width by 41 mm (MINI LUX) or by 37 mm (LUX). Fig.4 presents different types of side guides matching window glazing beads of various shapes.
- 4 Column 5 is completed in case of non-standard measurement (Fig.2).
- 5 For Fantazja Lux, Fantazja Mini Lux roller blind fabric options - see the price list.
- 6 Fantazja Lux ALU, Fantazja Mini Lux ALU – colours of accessories (column 9): white RAL 9003, brown RAL 8017, anthracite RAL 7016, grey RAL 7012, black matt RAL 9005 silver anode, golden oak, walnut, winchester, marsh oak, turner oak any RAL colour except pearly, metallic and fluorescent ones. / plastic parts of accessories available only in standard colours and in above-mentioned laminates. Colour of accessories: Fantazja Lux PCV (column 9) white RAL 9003, Fantazja Mini Lux PCV (column 9) white RAL 9003, brown RAL 8017, golden oak, walnut.
- 7 If no type of mounting is specified, the blind delivered will be mounted with screws.
- 8 PVC universal side guide – available colours: white RAL 9003, brown RAL 8017, golden oak, walnut.
AL side guide for windows with rounded glazing bead – available colours: white, ivory, light brown, grey, anthracite, black, golden oak (print), walnut (print).
PVC side guide for windows with rounded glazing bead – available colours: white
- 9 If no option in column 14 is selected, the manufacturer assumes that the blind will be mounted in a room/area young children have access to (length of operating chains/cords compliant with PN-EN 13120:2014+A1 standard).
- 10 Control length before the blind becomes compliant with 'Child Safety' standard ranges from 100 mm to 3400 mm (in 100 mm increments). If control length is not specified, the blind will be produced in accordance with manufacturer's standardisation.

Comments: