


RM 32, 40, 45 ROLLER BLIND - MOTORISED

		Angle bracket for	Angle bracket for guide wire B	Motorised o	Bottom finishes				
CUSTOMER:		guide wire A		BATTERY-POWERED / RADIO CONTROL	RM 40 WIRED CONTROL]	(column 12)		
		(column 11)	(column 11)	EB5 - BLE25 (built-in battery)	SONESSE 40 PA				
				MOTION CM03 (built-in battery)	TT GO S	STANDARD	W4	W5	W6
		ll l	II.	MOTION CM03 EVE (built-in battery)	VariEco S]			
				RM 32 WIRED CONTROL, RADIO CONTROL	SunTop S				
			23 mm	B11 - BPE25	RM 40 WIRED CONTROL, RADIO CONTROL			h	
Order No.		22 mm		RM 40 BATTERY-POWERED / RADIO CONTROL	B12 - BEQ35]		↑	
				EB6 – BLE35 (built-in battery)	Altus 40 RTS	<u></u>		20	30
Ordered on				MOTION CM06 (built-in battery)	Sonesse 40 RTS	56			
				MOTION CM06 EVE (built-in battery)	SunTop S 868 routing			<u> </u>	Ш
Date of delivery		↓ (© f , i	↓		RolTop T 868 routing	12	Ø25	6	- b
		→	<→		Sonesse 40 io				
		28 mm 14 r	14 mm		RM 45 RADIO CONTROL	1			
					B11 - BPE25				

Blind width ⁽²⁾	Height (mm)	QTY (pcs)	Fabric code ⁽³⁾	Control side		Mounting location		Roller blind system	Cover / profile / cassette	Colour of accessories (4)	Guide wire or support bracket ⁽⁵⁾	motorised ⁽⁶⁾	Control unit Fixing brackets for guide wire		Bottom finishes			
Total (mm) Fabric width (mm)				L	R	wall	ceiling					moto	type A	type B	Standard (7)	W4 (8)	W5	W6 (10)
1	2	3	4	5 6		6	7	8	9	10		11		12				

Please note:

- 1 Slight variations in the shades and patterns of fabrics as well as accessories may occasionally occur.
- 2 When providing the width of the blind, the customer fills in only one of the two columns (depending on type of measurement). The difference between the width of the whole roller blind (total width) and the width of the fabric in RM 32, 40, 45 free hanging roller blind systems is 35mm. Fabrics are joined horizontally by welding or sewing.
- 3 For RM 32, 40, 45 roller blind fabric options see the price list.
- 4 Select a colour from the available options (see: price list).
- 5 Bottom bracket for guide wire is available in colour white only (for RM-32, RM-40, 40+, RM-45, 45+ free-hanging systems only). In guide wire system the bottom bar is 10 mm wider than total width (see figure above).
- 6 For motor control components, see the price list.
- 7 Standard bottom bar standard aluminium bottom bar no wrapping; standard aluminium bottom bar wrapped on one side; standard aluminium bottom bar - wrapped on both sides (colours: white, cream, grey, anthracite, black). The type of wrapping depends on the thickness and type of fabric.
- 8 Rounded bottom bar W4; material aluminium, colur white, silver anode.
- 9 W5 wood from the current collection.
- 10 W6 aluminium colour: silver anode.

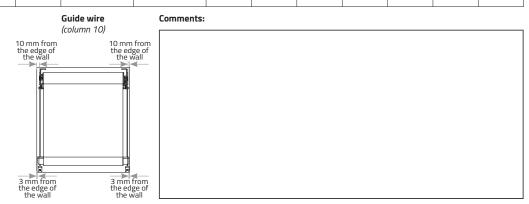

edition November_2024