

VERTICAL BLIND with operating wand ORDER FORM

CUSTOMER:

Bracket (column9)

Stacking options (column 7)
- movement of slats in relation to control unit

Order No.







Ordered on

Date of delivery

Head rail

A – wall mount

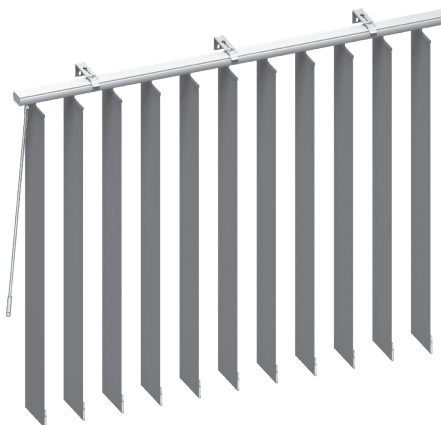
B – top fixing

[illegible]

Please note:

- (1) The length of a standard operating wand:
- in blinds > 2000 mm – height of blind minus 1500 mm,
 - in blinds < 2000 mm – half of the blind's height.

1. The standard blind is fitted with a head rail, a link runner without a hook and a B bracket (colour-coordinated with accessories).
2. The range of operating wand lengths available is 100 mm to 3000 mm (the wand is cut every 100 mm – the lengths on offer are: 100, 200, 300, 400 mm etc.)
3. The slats for blinds of overall height over 4000 mm are sewn (not glued or welded).



Comments:
